

# Offshore Hydromechanics Part 2

Ir. Peter Naaijen

## 5. Potential Flow Diffraction problems

OE 4630 2012 - 2013  
Offshore Hydromechanics, lecture 1



[1]



[2]

Take your laptop, i- or whatever smart-phone and go to:  
[www.rwpoll.com](http://www.rwpoll.com)  
Login with session ID

Teacher module II:

- Ir. Peter Naaijen
- p.naijen@tudelft.nl
- Room 34 B-0-360 (next to towing tank)

Book:

- Offshore Hydromechanics, by J.M.J. Journee & W.W.Massie

Useful weblinks:

- <http://www.shipmotions.nl>
- Blackboard

OE4630 module II course content

- +/- 7 Lectures
- Bonus assignments (optional, contributes 20% of your exam grade)
- Laboratory Exercise (starting 30 nov)
  - 1 of the bonus assignments is dedicated to this exercise
  - Groups of 7 students
  - Subscription available soon on BB
- Written exam

Schedule OE4630 D2, Offshore Hydromechanics Pt 2, 2012-2013 **Version 1 (9-11-2012)**  
Disclaimer: always track for (last minute) changes in location at [huisgeroosters.tudelft.nl/!](http://huisgeroosters.tudelft.nl/)

Date:	Time:	Type:	Teacher:	Location
Wed 14 Nov	13.30 – 16.30	Lecture	Peter Naaijen	3mE-C2 D (James Watt)
Wed 14 Nov	16.30 – 17.30	Assignment assistance /Questions	Peter Naaijen	3mE-C2 D (James Watt)
Fri 16 Nov	10.30 – 12.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)
Mon 19 Nov	15.30 – 17.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)
Tue 20 Nov	13.30 – 15.30	Assignment assistance /Questions	Peter Naaijen	3mE-C2 C (Daniel Bernoulli)
Wed 28 Nov	13.30 – 15.30	Lecture	Peter Naaijen	3mE-C2 D (James Watt)
Wed 28 Nov	15.30 – 17.30	Assignment assistance /Questions	Peter Naaijen	3mE-C2 D (James Watt)
Fri 30 Nov	10.30 – 13.00	Lab session	Peter Naaijen	Towing Tank
Mon 3 Dec	15.30 – 17.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)
Tue 4 Dec	13.30 – 16.00	Lab session	Gideon Hertzberger	Towing Tank
Tue 4 Dec	16.30 – 17.30	Assignment assistance /Questions	Peter Naaijen	Room Peter Naaijen (34 B 0 360)
Mon 10 Dec	15.30 – 17.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)
Mon 17 Dec	15.30 – 17.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)
Mon 7 Jan	15.30 – 17.30	Lecture	Peter Naaijen	3mE-C2 B (Isaac Newton)

Lecture notes:

- Disclaimer: Not everything you (should) learn is in the lecture notes (lees: niet alles wat op het tentamen gevraagd kan worden staat in diktaat...) →

Make personal notes during lectures!!

- Don't save your questions 'till the break →

Ask if anything is unclear

---

**TU Delft** OE4630 2012-2013, Offshore Hydromechanics, Part 2 5  
 Marine Engineering, Ship Hydromechanics Section


Learning goals Module II, behavior of floating bodies in waves

<ul style="list-style-type: none"> <li>Definition of ship motions</li> <li><b>Motion Response in regular waves:</b> <ul style="list-style-type: none"> <li>How to use RAO's</li> <li>Understand the terms in the equation of motion: hydromechanic reaction forces, wave exciting forces</li> <li>How to solve RAO's from the equation of motion</li> </ul> </li> <li><b>Motion Response in irregular waves:</b> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum without forward speed</li> </ul> </li> </ul>		
<ul style="list-style-type: none"> <li><b>3D linear Potential Theory</b> <ul style="list-style-type: none"> <li>How to determine hydrodynamic reaction coefficients and wave forces from Velocity Potential</li> <li>How to determine Velocity Potential</li> </ul> </li> </ul>		
<ul style="list-style-type: none"> <li><b>Motion Response in irregular waves:</b> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum with forward speed</li> </ul> </li> <li>Make down time analysis using wave spectra, scatter diagram and RAO's</li> </ul>	Ch. 8	
<ul style="list-style-type: none"> <li><b>Structural aspects:</b> <ul style="list-style-type: none"> <li>Calculate internal forces and bending moments due to waves</li> </ul> </li> </ul>		
<ul style="list-style-type: none"> <li><b>Nonlinear behavior:</b> <ul style="list-style-type: none"> <li>Calculate mean horizontal wave force on wall</li> <li>Use of time domain motion equation</li> </ul> </li> </ul>	Ch.6	

---

**TU Delft** OE4630 2012-2013, Offshore Hydromechanics, Part 2 6  
 Marine Engineering, Ship Hydromechanics Section

## Introduction




[3]

---

**TU Delft** OE4630 2012-2013, Offshore Hydromechanics, Part 2 7  
 Marine Engineering, Ship Hydromechanics Section

## Introduction

Offshore → oil resources have to be explored in deeper water → floating structures instead of bottom founded



[4]

---

**TU Delft** OE4630 2012-2013, Offshore Hydromechanics, Part 2 8  
 Marine Engineering, Ship Hydromechanics Section

## Introduction

Reasons to study waves and ship behavior in waves:

- the dynamic loads on the floating structure, its cargo or its equipment:
  - Inertia forces on sea fastening due to accelerations:



## Introduction

Reasons to study waves and ship behavior in waves:

- the dynamic loads on the floating structure, its cargo or its equipment:
  - Direct wave induced structural loads




Minimum required air gap to avoid wave damage

## Introduction

Reasons to study waves and ship behavior in waves:


- Determine allowable / survival conditions for offshore operations

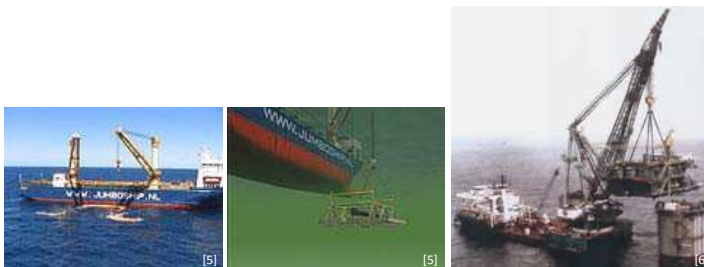

## Introduction

Decommissioning / Installation / Pipe laying → Excalibur / Allseas 'Pieter Schelte'

- Motion Analysis

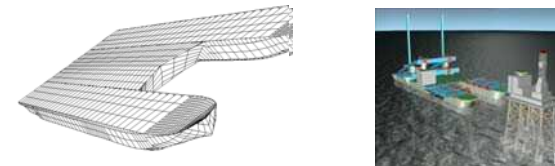

## Introduction

Reasons to study waves and ship behavior in waves:

- the dynamic loads on the floating structure, its cargo or its equipment:
  - Forces on mooring system, motion envelopes loading arms



[8]



[2]

## Introduction

Floating Offshore: More than just oil



Floating wind farm

[9]



OTEC

[10]

## Introduction

Floating Offshore: More than just oil



[11]




[12]

Wave energy conversion

## Introduction

Floating Offshore: More than just oil

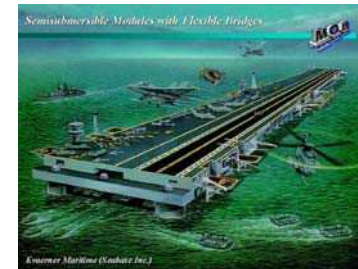


Mega Floaters

# Introduction


## Reasons to study waves and ship behavior in waves:

- Determine allowable / survival conditions for offshore operations
- Downtime analysis

Wave Direction (°)	Wave Period (s)															
	35	45	55	65	75	85	95	105	115	125	135	Total				
14	0	0	0	0	2	3	154	332	466	370	233	198				
13	0	0	0	0	3	33	145	238	322	293	101	119				
12	0	0	0	0	7	72	289	539	588	345	148	194				
11	0	0	0	0	17	160	385	635	691	543	271	344				
10	0	0	0	1	41	383	820	1262	1579	1463	381	694				
9	0	0	0	4	139	845	2085	3443	4548	4283	432	1126				
8	0	0	0	12	285	1936	5957	10333	14333	1682	572	2107				
7	0	0	0	41	695	4225	13337	27382	45755	6294	703	3344				
6	0	0	1	138	2293	13997	33520	69798	10955	1222	767	6597				
5	0	0	7	471	6987	24035	66940	12712	19389	3387	694	11442				
4	0	0	38	1986	15257	40332	93947	18359	27910	279	471	10304				
3	0	0	148	5107	36520	70337	148319	28984	4604	232	29711					
2	0	4	488	15941	10897	22599	43353	8382	1225	338	41	23054				
1	0	40	2899	22884	49899	94632	11554	2218	282	27	2	12465				
0	5	30	334	2831	5888	1038	216	18	1	0	0	1340				
Total	5	30	688	5242	13073	27732	28169	49361	6738	1821	4832	99337				



Real-time motion prediction  
Using X-band radar remote wave observation

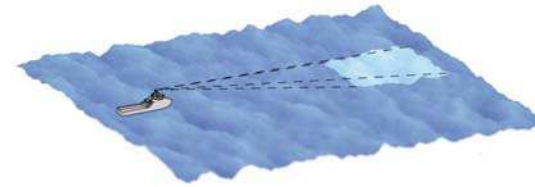


# Definitions & Conventions

Regular waves  
Ship motions



# Irregular wind waves

apparently irregular but can be considered as a superposition of a finite number of regular waves, each having own frequency, amplitude and propagation direction

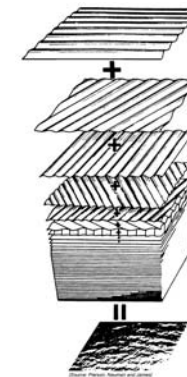

## Regular waves

(Ch.5 revisited)

## Regular waves



regular wave propagating in direction  $\mu$ :

$$\zeta(t, x) = \zeta_a \cos(\omega t - kx \cos \mu - ky \sin \mu)$$

$$k = 2\pi / \lambda$$

$$\omega = 2\pi / T$$



Linear solution Laplace equation



- Regular waves
- regular wave propagating in direction  $\mu$

$$\zeta(t, x) = \zeta_a \cos(\omega t - kx \cos \mu - ky \sin \mu)$$

Phase angle  $\epsilon$



Phase angle wave at black dot with respect to wave at red dot:  
 $\epsilon_{\zeta, z} = -k(x-x_0) \cos \mu - k(y-y_0) \sin \mu$


## Co-ordinate systems

Definition of systems of axes

Earth fixed:  $(x_0, y_0, z_0)$


Following average ship position:  $(x, y, z)$

wave direction with respect to ship's axes system:  $\mu$



### Behavior of structures in waves


Ship's body bound axes system  $(x_b, y_b, z_b)$  follows all ship motions



### Behavior of structures in waves

Definition of translations


		NE	EN
1	x	Schrikken	Surge
2	y	Verzetten	Sway
3	z	Dampen	Heave

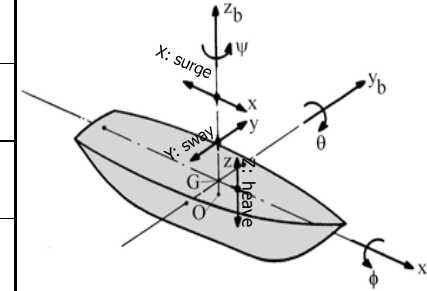

### Behavior of structures in waves

Definition of rotations

		NE	EN
4	x	Slingeren	Roll
5	y	Stampen	Pitch
6	z	Gieren	Yaw

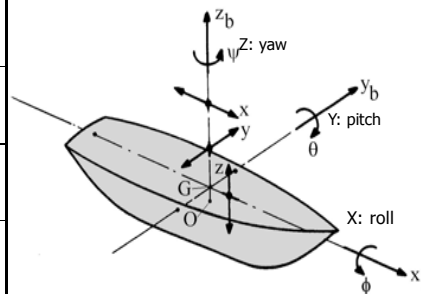

How do we describe ship motion response?


Rao's  
Phase angles



## Mass-Spring system:

$$m\ddot{z} + b\dot{z} + cz = F_a \cos(\omega t) \quad \text{Motion equation}$$

$$z(t) = z_a \cos(\omega t + \varepsilon) \quad \text{Steady state solution}$$



## Motions of and about COG

Amplitude      Phase angle

$$\text{Surge(schrikken)}: x = x_a \cos(\omega t + \varepsilon_{x\zeta})$$

$$\text{Sway(verzetten)}: y = y_a \cos(\omega t + \varepsilon_{y\zeta})$$

$$\text{Heave(dompen)}: z = z_a \cos(\omega t + \varepsilon_{z\zeta})$$

$$\text{Roll(rollen)}: \langle \text{phi} \rangle \phi = \phi_a \cos(\omega t + \varepsilon_{\phi\zeta})$$


$$\text{Pitch(stampen)}: \langle \text{theta} \rangle \theta = \theta_a \cos(\omega t + \varepsilon_{\theta\zeta})$$

$$\text{Yaw(gieren)}: \langle \text{psi} \rangle \psi = \psi_a \cos(\omega t + \varepsilon_{\psi\zeta})$$

Phase angles  $\varepsilon$  are related to undisturbed wave at origin of steadily translating ship-bound system of axes ( $\rightarrow$ COG)

## Motions of and about COG

Phase angles  $\varepsilon$  are related to undisturbed wave at origin of steadily translating ship-bound system of axes ( $\rightarrow$ COG)

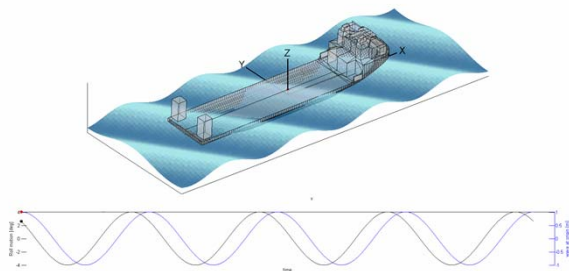

## Motions of and about COG

$$\text{Surge(schrikken)}: x = x_a \cos(\omega t + \varepsilon_{x\zeta}) \quad \text{RAOSurge: } \frac{x_a}{\zeta_a}(\omega, \mu)$$

$$\text{Sway(verzetten)}: y = y_a \cos(\omega t + \varepsilon_{y\zeta}) \quad \text{RAOSway: } \frac{y_a}{\zeta_a}(\omega, \mu)$$

$$\text{Heave(dompen)}: z = z_a \cos(\omega t + \varepsilon_{z\zeta}) \quad \text{RAOHeave: } \frac{z_a}{\zeta_a}(\omega, \mu)$$

$$\text{Roll(rollen)}: \langle \text{phi} \rangle \phi = \phi_a \cos(\omega t + \varepsilon_{\phi\zeta}) \quad \text{RAORoll: } \frac{\phi_a}{\zeta_a}(\omega, \mu)$$


$$\text{Pitch(stampen)}: \langle \text{theta} \rangle \theta = \theta_a \cos(\omega t + \varepsilon_{\theta\zeta}) \quad \text{RAOPitch: } \frac{\theta_a}{\zeta_a}(\omega, \mu)$$

$$\text{Yaw(gieren)}: \langle \text{psi} \rangle \psi = \psi_a \cos(\omega t + \varepsilon_{\psi\zeta}) \quad \text{RAOYaw: } \frac{\psi_a}{\zeta_a}(\omega, \mu)$$

RAO and phase depend on:

- Wave frequency
- Wave direction

### Example: roll signal

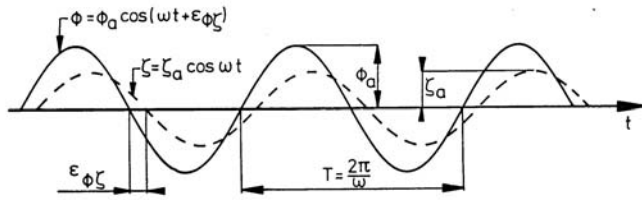

Displacement  $\phi = \phi_a \cos(\omega_e t + \epsilon_{\phi\zeta})$   
 Velocity...  $\dot{\phi} = -\omega_e \phi_a \sin(\omega_e t + \epsilon_{\phi\zeta}) = \omega_e \phi_a \cos(\omega_e t + \epsilon_{\phi\zeta} + \pi/2)$   
 Acceleration...  $\ddot{\phi} = -\omega_e^2 \phi_a \cos(\omega_e t + \epsilon_{\phi\zeta}) = \omega_e^2 \phi_a \cos(\omega_e t + \epsilon_{\phi\zeta} + \pi)$

### Motions of and about COG

- 1 Surge(schrikken):  $x = x_a \cos(\omega t + \epsilon_{x\zeta})$
- 2 Sway(verzetten):  $y = y_a \cos(\omega t + \epsilon_{y\zeta})$
- 3 Heave(dopenen):  $z = z_a \cos(\omega t + \epsilon_{z\zeta})$
- 4 Roll(rollen):  $(\text{phi}) \phi = \phi_a \cos(\omega t + \epsilon_{\phi\zeta})$
- 5 Pitch(stampen):  $(\text{theta}) \theta = \theta_a \cos(\omega t + \epsilon_{\theta\zeta})$
- 6 Yaw(gieren):  $(\text{psi}) \psi = \psi_a \cos(\omega t + \epsilon_{\psi\zeta})$

- Frequency of input (regular wave) and output (motion) is ALWAYS THE SAME !!
- Phase can be positive ! (shipmotion ahead of wave elevation at COG)
- Due to symmetry: some of the motions will be zero
- Ratio of motion amplitude / wave amplitude = **RAO** (Response Amplitude Operator)
- RAO's and phase angles depend on wave frequency and wave direction
- RAO's and phase angles must be calculated by dedicated software or measured by experiments
- Only some special cases in which 'common sense' is enough:

### Consider Long waves relative to ship dimensions

What is the RAO of pitch in head waves ?


- Phase angle heave in head waves ?...
- RAO pitch in head waves ?...
- Phase angle pitch in head waves ?...
- Phase angle pitch in following waves ?...

### Consider very long waves compared to ship dimensions

What is the RAO for heave in head waves ?

60

- A. 0
- B.  $\infty$
- C. 1
- D. 42




Consider very long waves compared to ship dimensions

60

What is the phase for heave in head waves ?

- A. 0 deg
- B. 180 deg
- C. 90 deg
- D. I have no clue




Consider very long waves compared to ship dimensions

60

What is the phase for heave in head waves ?

- A. 0 deg
- B. 180 deg
- C. 90 deg
- D. I have no clue




Consider very long waves compared to ship dimensions

90

What is the RAO for pitch in head waves ?

- A.  $\infty$  rad/m
- B. 1 rad/m
- C. 0 rad/m
- D.  $k$  rad/m
- E. I have no clue




Consider very long waves compared to ship dimensions

90

What is the RAO for pitch in head waves ?

- A.  $\infty$  rad/m
- B. 1 rad/m
- C. 0 rad/m
- D.  $k$  rad/m
- E. I have no clue



Consider very long waves compared to ship dimensions  
 What is the phase for pitch in head waves ? 120

- A. 0 deg
- B. 180 deg
- C. -90 deg
- D. 90 deg
- E. I have no clue again



Consider very long waves compared to ship dimensions  
 What is the phase for pitch in head waves ? 120

- A. 0 deg
- B. 180 deg
- C. -90 deg
- D. 90 deg
- E. I have no clue again



**Local motions** (In steadily translating axes system)

- Only variations!!
- Linearized!!

$$\begin{pmatrix} x_p(t) \\ y_p(t) \\ z_p(t) \end{pmatrix} = \begin{pmatrix} x(t) \\ y(t) \\ z(t) \end{pmatrix} + \begin{pmatrix} 0 & -\psi(t) & \theta(t) \\ \psi(t) & 0 & -\phi(t) \\ -\theta(t) & \phi(t) & 0 \end{pmatrix} \cdot \begin{pmatrix} x_{bP} \\ y_{bP} \\ z_{bP} \end{pmatrix}$$


6 DOF Ship motions

Location considered point

$$x_p(t) = x(t) - y_{bP}\psi(t) + z_{bP}\theta(t)$$

$$y_p(t) = y(t) + x_{bP}\psi(t) - z_{bP}\phi(t)$$

$$z_p(t) = z(t) - x_{bP}\theta(t) + y_{bP}\phi(t)$$



**Local Motions**

Example 3: horizontal crane tip motions

The tip of an onboard crane, location:  
 $x_b, y_b, z_b = -40, -9.8, 25.0$



For a frequency  $\omega=0.6$  the RAO's and phase angles of the ship motions are:

SURGE RAO	SWAY RAO	RAO	phase	HEAVE RAO	RAO	phase	ROLL RAO	RAO	phase	PITCH RAO	RAO	phase	YAW RAO	RAO	phase
		deg/m	degr			deg/m	deg/m			deg/m	deg/m	degr			deg/m
1.014E-03	3.421E+02	5.992E-01	2.811E+02	9.991E-01	3.580E+02	2.590E+00	1.002E+02	2.424E-03	1.922E+02	2.102E-04	5.686E+01				

Calculate the RAO and phase angle of the transverse horizontal motion (y-direction) of the crane tip.

### Complex notation of harmonic functions


$$\begin{aligned}
 1 \text{ Surge (schrikken)}: x &= x_a \cos(\omega t + \varepsilon_{x_c}) \\
 &= \text{Re} \left( x_a e^{i(\omega t + \varepsilon_{x_c})} \right) \\
 &= \text{Re} \left( x_a e^{i\varepsilon_{x_c}} \cdot e^{i\omega t} \right) \\
 &= \text{Re} \left( \hat{x}_a \cdot e^{i\omega t} \right)
 \end{aligned}$$

Complex motion amplitude

• :

### Relation between Motions and Waves


How to calculate RAO's and phases ?

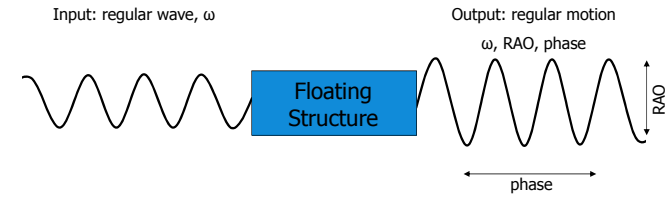

### Mass-Spring system:

Forces acting on body:

...?



### Mass-Spring system:

$$m\ddot{z} + b\dot{z} + cz = F_a \cos(\omega t)$$

Transient solution

$$z(t) = A e^{-\zeta \omega t} \sin(\sqrt{1 - \zeta^2} \omega t + \varphi)$$

$$\left( \zeta = \frac{b}{2\sqrt{mc}} \right) \text{ Damping ratio}$$


Steady state solution:

$$z(t) = z_a \cos(\omega t + \varepsilon)$$

$$\varepsilon = a \tan \left( \frac{-b\omega}{(-\omega^2(m+c))} \right)$$

$$z_a = \frac{F_a}{\sqrt{((-m)\omega^2 + c)^2 + (b\omega)^2}}$$

## Moving ship in waves:



$$m_3 \ddot{z} + b_3 \dot{z} + c_3 z = F_{a3} \cos(\omega t)$$



Restoring coefficient for heave ?

$$m_4 \ddot{\phi} + b_4 \dot{\phi} + c_4 \phi = F_{a4} \cos(\omega t)$$

Restoring coefficient for roll ?  
m for roll ?

## What is the hydrostatic spring coefficient for the sway motion ?

$$m_2 \cdot \ddot{y} + b_2 \cdot \dot{y} + c_2 \cdot y = F_{a2} \cos(\omega t)$$



A.  $c_2 = A_{wl} \rho g$

B.  $c_2 = A_{lat} \rho g$

C.  $c_2 = 0$

0% 0% 0%

Non linear stability issue...



## Roll restoring

Roll restoring coefficient:

$$c_4 = \rho g \nabla \cdot GM$$

What is the point the ship rotates around statically speaking ? (Ch 2)

### Floating stab.

#### Stability moment

$$M_s = \rho g \nabla \cdot GZ_\phi = \rho g \nabla \cdot GM \sin \phi \approx \rho g \nabla \cdot GM \cdot \phi$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 53  
Marine Engineering, Ship Hydromechanics Section

### Moving ship in waves:

$$m_4 \ddot{\phi} + b_4 \dot{\phi} + c_4 \phi = F_{a4} \cos(\omega t)$$

Restoring coefficient for roll ?

Rotation around COF

Rotation around COG  
= Rotation around COF  
+ vertical translation  $dz = FG - FG \cos \phi \approx 0$   
+ horizontal translation  $dy = FG \sin \phi \approx FG \phi$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 54  
Marine Engineering, Ship Hydromechanics Section

### Moving ship in waves: Not in air but in water!

SHIP MOTION : HEAVE

$$F = m \cdot \ddot{z}$$

- $F_w$
- $-c \cdot z$
- $-b \cdot \dot{z}$
- $-a \cdot \ddot{z}$  (Only potential / wave damping)

DAMPING

SPRING

ADDED MASS

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 55  
Marine Engineering, Ship Hydromechanics Section

### Moving ship in waves:

Analogy / differences with mass-spring system:


External force	$F(t)$	Wave exciting force Has a phase angle w r t undisturbed wave at COG
restoring force	$c \cdot z$	Archimedes: buoyancy
Damping force	$b \cdot dz/dt$	Hydrodynamic damping
Inertia force	$M \cdot d^2z/dt^2$	Mass + Hydrodynamic Mass

Depend on frequency !

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 56  
Marine Engineering, Ship Hydromechanics Section


## Moving ship in waves:

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$

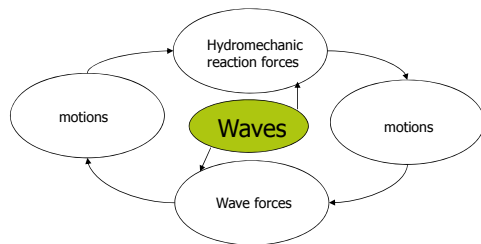

## Moving ship in waves:

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$

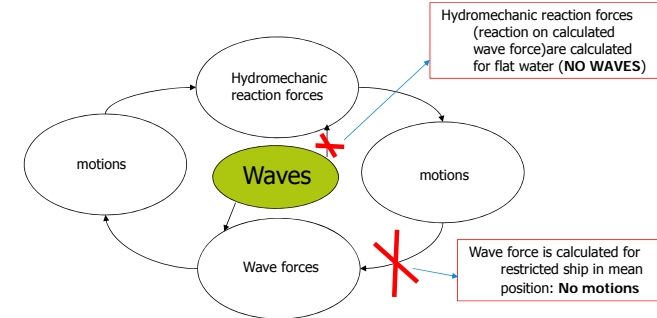

## Right hand side of m.e.: Wave Exciting Forces

- Incoming: regular wave with given frequency and propagation direction
- Assuming the vessel is not moving

## Back to Regular waves

regular wave propagating in direction  $\mu$   

$$\zeta(t, x) = \zeta_a \cos(\omega t - kx \cos \mu - ky \sin \mu)$$

Linear solution Laplace equation

In order to calculate forces on immersed bodies:  
 What happens underneath free surface ?



## Back to Regular waves

regular wave propagating in direction  $\mu$   
 $\zeta(t, x) = \zeta_a \cos(\omega t - kx \cos \mu - ky \sin \mu)$

Linear solution Laplace equation

In order to calculate forces on immersed bodies:  
 What happens underneath free surface ?

## Potential Theory

What is potential theory ?:  
 way to give a mathematical description of flowfield

Most complete mathematical description of flow is  
 viscous Navier-Stokes equation:

## Navier-Stokes vergelijkingen:

$$\rho \frac{\partial u}{\partial t} + \rho u \frac{\partial u}{\partial x} + \rho v \frac{\partial u}{\partial y} + \rho w \frac{\partial u}{\partial z} = -\frac{\partial p}{\partial x} + \frac{\partial}{\partial x} (\lambda \nabla \cdot \mathbf{V} + 2\mu \frac{\partial u}{\partial x}) + \frac{\partial}{\partial y} \left[ \mu \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) \right] + \frac{\partial}{\partial z} \left[ \mu \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \right]$$

$$\rho \frac{\partial v}{\partial t} + \rho u \frac{\partial v}{\partial x} + \rho v \frac{\partial v}{\partial y} + \rho w \frac{\partial v}{\partial z} = -\frac{\partial p}{\partial y} + \frac{\partial}{\partial x} \left[ \mu \left( \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) \right] + \frac{\partial}{\partial y} (\lambda \nabla \cdot \mathbf{V} + 2\mu \frac{\partial v}{\partial y}) + \frac{\partial}{\partial z} \left[ \mu \left( \frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) \right]$$



$$\rho \frac{\partial w}{\partial t} + \rho u \frac{\partial w}{\partial x} + \rho v \frac{\partial w}{\partial y} + \rho w \frac{\partial w}{\partial z} = -\frac{\partial p}{\partial z} + \frac{\partial}{\partial x} \left[ \mu \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \right] + \frac{\partial}{\partial y} \left[ \mu \left( \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right) \right] + \frac{\partial}{\partial z} (\lambda \nabla \cdot \mathbf{V} + 2\mu \frac{\partial w}{\partial z})$$

(not relaxed)

**Water is hard to compress, we will assume this is impossible**

→

**Apply principle of continuity on control volume:**



Continuity: what comes in,  
 must go out

**This results in continuity equation:**

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

**If in addition the flow is considered to be irrotational and non viscous →**

**Velocity potential function can be used to describe water motions**

**Main property of velocity potential function:**

for potential flow, a function  $\Phi(x,y,z,t)$  exists whose derivative in a certain arbitrary direction equals the flow velocity in that direction. This function is called the velocity potential.

From definition of velocity potential:

$$u = \frac{\partial \Phi}{\partial x}, v = \frac{\partial \Phi}{\partial y}, w = \frac{\partial \Phi}{\partial z}$$

Substituting in continuity equation:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

Results in Laplace equation:

$$\frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} + \frac{\partial^2 \Phi}{\partial z^2} = 0$$

## Summary

- Potential theory is mathematical way to describe flow

Important facts about velocity potential function  $\Phi$ :

- definition:  $\Phi$  is a function whose derivative in any direction equals the flow velocity in that direction
- $\Phi$  describes non-viscous flow
- $\Phi$  is a scalar function of space and time (NOT a vector!)

## Summary

- Velocity potential for regular wave is obtained by
  - Solving Laplace equation satisfying:
    1. Seabed boundary condition
    2. Dynamic free surface condition

$$\Phi(x, y, z, t) = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx \cos \mu + ky \sin \mu - \omega t)$$

$$\Phi(x, y, z, t) = \frac{\zeta_a g}{\omega} \cdot \frac{\cosh(k(h+z))}{\cosh(kh)} \cdot \sin(kx \cos \mu + ky \sin \mu - \omega t)$$


3. Kinematic free surface boundary condition results in:  
Dispersion relation = relation between wave frequency and wave length

$$\omega^2 = kg \tanh(kh)$$

## Water Particle Kinematics

### trajectories of water particles in infinite water depth


$$\Phi(x, y, z, t) = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx \cos \mu + ky \sin \mu - \omega t)$$

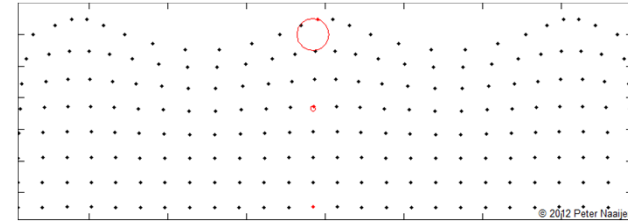

## Water Particle Kinematics

### trajectories of water particles in finite water depth

$$\Phi(x, y, z, t) = \frac{\zeta_a g}{\omega} \cdot \frac{\cosh(k(h+z))}{\cosh(kh)} \cdot \sin(kx \cos \mu + ky \sin \mu - \omega t)$$



## Pressure

Pressure in the fluid can be found using Bernoulli equation for unsteady flow:

$$\frac{\partial \Phi}{\partial t} + \frac{1}{2}(u^2 + w^2) + \frac{p}{\rho} + gz = 0$$

$$p = -\rho \frac{\partial \Phi}{\partial t} - \frac{1}{2} \rho (u^2 + w^2) - \rho gz$$

1<sup>st</sup> order fluctuating pressure

2<sup>nd</sup> order (small quantity squared = small enough to neglect)

Hydrostatic pressure (Archimedes)

## Potential Theory


From all these velocity potentials we can derive:

- Pressure
- Forces and moments can be derived from pressures:


$$\bar{F} = -\iint_S (p \cdot \bar{n}) dS$$

$$\bar{M} = -\iint_S p \cdot (\bar{r} \times \bar{n}) dS$$

Verify these formulae (incl the signs!) yourself in order to understand them. Just check e.g. the force in heave direction ( $F_z$ ) and the pitch moment ( $M_y$ ) induced by a pressure on an infinite piece of hull surface  $dS$  at location  $P$ :




## Wave Force





Determination  $F_w$

- Froude Krilov
- Diffraction

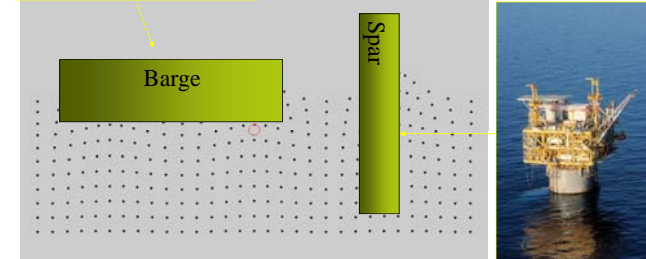

Which structure experiences the highest vertical wave load acc. to potential theory ?

- The Barge
- The Spar
- Equal forces on both




## Flow superposition

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$

Considering a fixed structure (ignoring the motions) we will try to find a description of the disturbance of the flow by the presence of the structure in the form of a velocity potential. We will call this one the diffraction potential and added to the undisturbed wave potential (for which we have an analytical expression) it will describe the total flow due to the waves.


1. Flow due to Undisturbed wave

$$\Phi_0 = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(\omega t - kx \cos \mu - ky \sin \mu)$$



2. Flow due to Diffraction

Has to be solved. What is boundary condition at body surface ?




Exciting force due to waves

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$


$$= F_{FK} + F_D$$

1. Undisturbed wave force (Froude-Krilov)
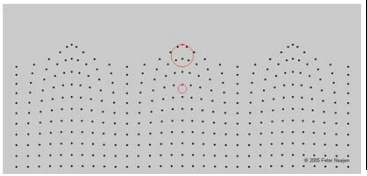
$$\Phi_0 = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(\omega t - kx \cos \mu - ky \sin \mu + \varepsilon)$$


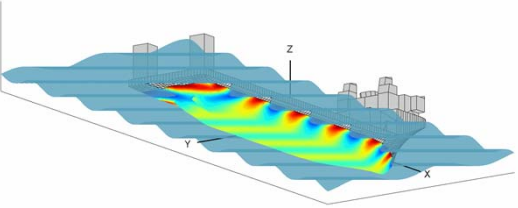
2. Diffraction force

Has to be solved. What is boundary condition at body surface?




TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 77  
Marine Engineering, Ship Hydromechanics Section

Pressure due to undisturbed incoming wave  
T=4 s




TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 78  
Marine Engineering, Ship Hydromechanics Section

Pressure due to undisturbed incoming wave  
T=10 s

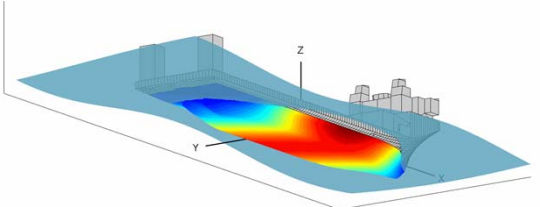

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 79  
Marine Engineering, Ship Hydromechanics Section


Wave Forces  
Wave force acting on vertical wall

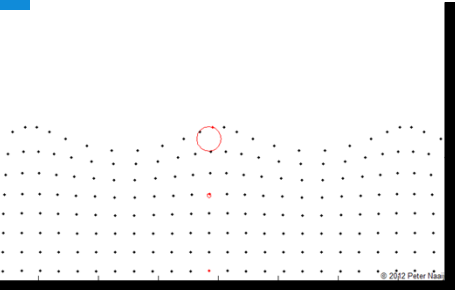

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 80  
Marine Engineering, Ship Hydromechanics Section

What is the formulation of diffraction potential  $\Phi_7$  ?


$$\Phi_0(x, z, t) = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$$

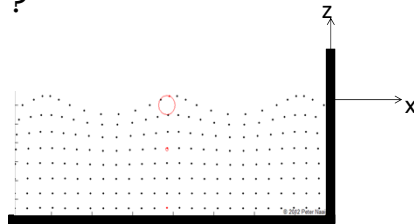

- A.  $\Phi_7(x, z, t) = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx + \omega t)$
- B.  $\Phi_7(x, z, t) = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$
- C.  $\Phi_7(x, z, t) = 0$

What is the formulation of diffraction potential  $\Phi_7$  ?

$$\Phi_0(x, z, t) = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$$

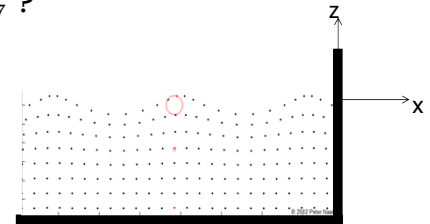


- A.  $\Phi_7(x, z, t) = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx + \omega t)$
- B.  $\Phi_7(x, z, t) = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$
- C.  $\Phi_7(x, z, t) = 0$

Calculating hydrodynamic coefficient and diffraction force


$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W = F_{FK} + F_D$$

$$\Phi_0 = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$$

$$\Phi_7 = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx + \omega t)$$



$$\Phi_0 + \Phi_7 = -2 \frac{\zeta_a g}{\omega} \cdot e^{kz} \sin(\omega t) \cos(kx)$$



Force on the wall

$$\bar{F} = - \int_{-\infty}^0 p \cdot \bar{n} dz$$

$$\Phi_0 = \frac{\zeta_a g}{\omega} \cdot e^{kz} \sin(kx - \omega t), \Phi_7 = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \sin(kx + \omega t)$$

$$p = -\rho \frac{\partial \Phi}{\partial t} = -\rho \frac{\partial (\Phi_0 + \Phi_7)}{\partial t} =$$

$$-\rho \left( -2 \frac{\zeta_a g}{\omega} \cdot e^{kz} \sin(\omega t) \cos(kx) \right) =$$


$$2\rho \zeta_a g \cdot e^{kz} \cos(kx) \cos(\omega t)$$

$$\bar{n} = (-1, 0, 0)$$

$$x = 0$$

$$F_x = \int_{-\infty}^0 2\rho \zeta_a g \cdot e^{kz} \cos(\omega t) dz = \left[ 2\rho \frac{\zeta_a g}{k} \cdot e^{kz} \cos(\omega t) \right]_{-\infty}^0 =$$

$$2\rho \frac{\zeta_a g}{k} \cdot \cos(\omega t) - 0$$

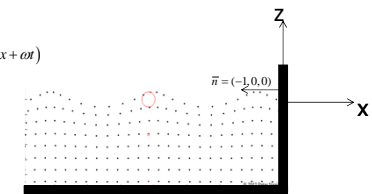

## Left hand side of m.e.: Hydromechanic reaction forces

- NO incoming waves:
- Vessel moves with given frequency

## Recap: Motion equation

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = +F_{FK} + F_D = F_W$$

Hydromechanic force  
depends on motion


Wave Force  
independent of  
motion

Pressure / force due to undisturbed incoming wave  
T=10 s

$$p = -\rho \frac{\partial \Phi}{\partial t}$$

$$\vec{F} = -\iint_S (p \cdot \vec{n}) dS$$

$$\vec{M} = -\iint_S p \cdot (\vec{r} \times \vec{n}) dS$$

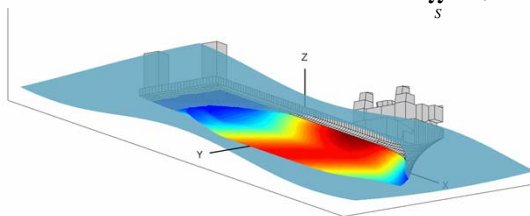


Calculating diffraction force


$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W = F_{FK} + F_D$$

$$\Phi_0 = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx - \omega t)$$

$$\Phi_1 = -\frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx + \omega t)$$



$$\Phi_0 + \Phi_1 = -2 \frac{\zeta_a g}{\omega} \cdot e^{kz} \sin(\omega t) \cos(kx)$$



## left hand side: reaction forces

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = +F_{FK} + F_D = F_W$$

Hydromechanic force depends on motion
Wave Force independent of motion

## Hydrodynamic coefficients

Determination of a and b:


- Forced oscillation with known frequency and amplitude
- Measure Force needed to oscillate the model

### 6 Degree of Freedom Forced Oscillation tests

July-August 2004

## Determine added mass and damping

Experimental procedure:

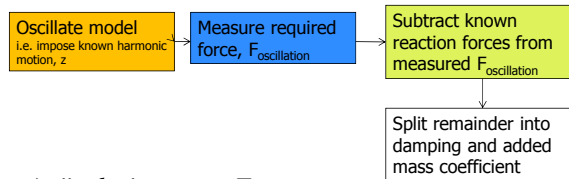

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_{oscillation}$$

$$z = z_a \cos(\omega t), \dot{z} = -\omega z_a \sin(\omega t), \ddot{z} = -\omega^2 z_a \cos(\omega t)$$

$$(-\omega^2(m+a) + c) z_a \cos \omega t - \omega b z_a \sin \omega t = F_{a,osc} \cdot \cos(\omega t + \varepsilon_{F,z})$$

$$-\omega^2 a z_a \cos \omega t - \omega b z_a \sin \omega t = F_{a,osc} \cdot \cos(\omega t + \varepsilon_{F,z}) + (\omega^2 m - c) z_a \cos \omega t$$

## Equation of motion

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W$$

Hydrodynamic coefficients:

a=added mass coefficient= force on ship per 1 m/s<sup>2</sup> acceleration →

a \* acceleration = **hydrodynamic inertia force**

b=damping coefficient= force on ship per 1 m/s velocity →


b \* velocity = **hydrodynamic damping force**



## Calculating hydrodynamic coefficients added mass and damping

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$


- Oscillation in desired direction **in still water**
- To prevent water from penetrating through the hull: we need the radiation velocity potentials:  $\Phi_1 - \Phi_6$
- From potentials, we can calculate forces on body and the corresponding coefficients



For each of the 6 possible motions, the flow is described by a radiation potential function. The incoming waves are ignored for this. By finding a description of the flow, the pressures and consequently the forces can be determined later

## Solving the Laplace equation

Summary

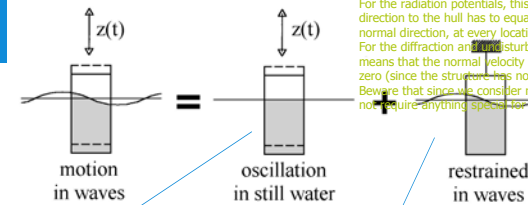


The boundary conditions are the same as those used for the undisturbed wave (Ch 5) however, we have an additional boundary now which is the hull of the structure: it has to be water tight!  
For the radiation potentials, this means: the flow in normal direction to the hull has to equal the velocity of the hull in normal direction, at every location.  
For the diffraction and undisturbed wave potential it means that the normal velocity due to their sum must be zero (since the structure has no velocity itself).  
Beware that since we consider non viscous flow, we do not require anything special for the tangential velocity!

Radiation potential  $\Phi_{1, \dots, 6}$   
Boundary Condition:  $\frac{\partial \Phi_{1, \dots, 6}}{\partial n} = v_n$

Undisturbed wave potential  $\Phi_0$   
Diffraction potential  $\Phi_7$   
Boundary Condition:  $\frac{\partial \Phi_0}{\partial n} + \frac{\partial \Phi_7}{\partial n} = 0$

## Moving ship in waves: Not in air but in water!

SHIP MOTION: HEAVE



$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w$$


$$\vec{F} = - \iint_S (p \cdot \vec{n}) dS$$

$$p = -\rho \frac{\partial \Phi}{\partial t}$$

$$\vec{M} = - \iint_S p \cdot (\vec{r} \times \vec{n}) dS$$

## Which body will have the largest added mass for roll ?

- A
- B
- Equal added mass
- Depends on the frequency

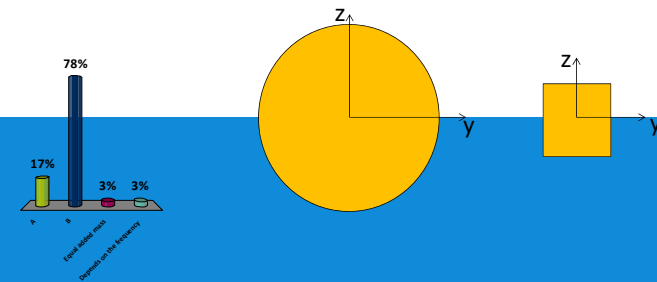

## Equation of motion

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = +F_{FK} + F_D = F_W$$

To solve equation of motion for certain frequency:

- Determine spring coefficient:
  - $c \rightarrow$  follows from geometry of vessel
- Determine required hydrodynamic coefficients for desired frequency:
  - a, b  $\rightarrow$  computer / experiment
- Determine amplitude and phase of  $F_w$  of regular wave with amplitude =1:
  - Computer / experiment:  $F_w = F_{wa} \cos(\omega t + \varepsilon_{F_w, \zeta})$
- As we consider the response to a regular wave with frequency  $\omega$ :  
Assume steady state response:  $z = z_a \cos(\omega t + \varepsilon_{z, \zeta})$   
and substitute in equation of motion:

## Equation of motion

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W$$

$$z = z_a \cos(\omega t + \varepsilon_{z, \zeta})$$

$$\dot{z} = -z_a \omega \sin(\omega t + \varepsilon_{z, \zeta})$$

$$\ddot{z} = -z_a \omega^2 \cos(\omega t + \varepsilon_{z, \zeta})$$


$$(c - \omega^2(m + a)) \cdot z_a \cos(\omega t + \varepsilon_{z, \zeta}) + b \cdot -z_a \omega \sin(\omega t + \varepsilon_{z, \zeta}) = F_{W_a} \cos(\omega t + \varepsilon_{F_w, \zeta})$$

Now solve the equation for the unknown motion amplitude  $z_a$  and phase angle  $\varepsilon_{z, \zeta}$

## Equation of motion

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W$$

Now solve the equation for the unknown motion amplitude  $z_a$  and phase angle  $\varepsilon_{z, \zeta}$  for 1 frequency




If wave amplitude doubles  $\rightarrow$  wave force doubles  $\rightarrow$  motion doubles

$$(m + a) \cdot \frac{\ddot{z}}{\zeta_a} + b \cdot \frac{\dot{z}}{\zeta_a} + c \cdot \frac{z}{\zeta_a} = \frac{F_W}{\zeta_a}$$


Substitute solution  $\frac{z}{\zeta_a} = \frac{z_a}{\zeta_a} \cos(\omega t + \varepsilon_{z, \zeta})$  and solve RAO and phase

## RAO


$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W$$

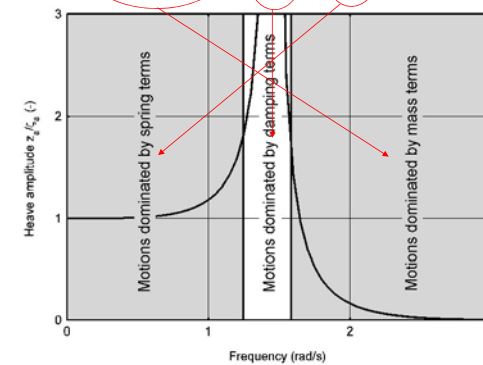

## Calculated RAO spar with potential theory

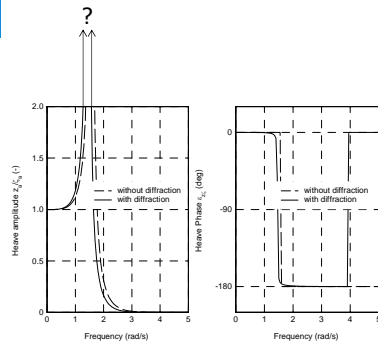

## Frequency Response of semi-submersible

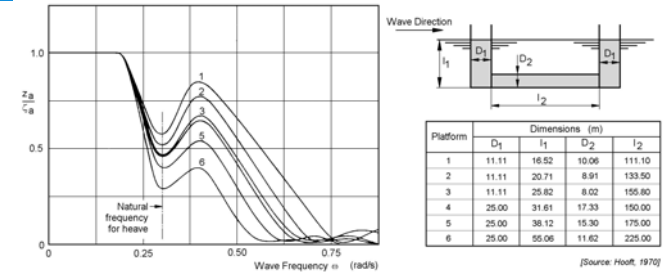

## What is 'linear' ???

- R**
- Linear waves:
    - 'nice' regular harmonic (cosine shaped) waves
    - Wave steepness small: free surface boundary condition satisfied at mean still water level
      - Pressures and fluid velocities are proportional to wave elevation and have same frequency as elevation
  - linearised wave exciting force:
    - Wave force independent of motions
    - Wave force only on mean wetted surface
- L**
- Motion amplitudes are small
    - Restoring force proportional to motion amplitude
    - Hydrodynamic reaction forces proportional to motion amplitude

Motions are proportional to wave height !

Motions have same frequency as waves

## Learning goals Module II, behavior of floating bodies in waves

<ul style="list-style-type: none"> <li>Definition of ship motions</li> </ul> <p><b>Motion Response in regular waves:</b></p> <ul style="list-style-type: none"> <li>How to use RAO's</li> <li>Understand the terms in the equation of motion: hydrodynamic reaction forces, wave exciting forces</li> <li>How to solve RAO's from the equation of motion</li> </ul> <p><b>Motion Response in irregular waves:</b></p> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum without forward speed</li> </ul>	Ch.6
<p><b>3D linear Potential Theory</b></p> <ul style="list-style-type: none"> <li>How to determine hydrodynamic reaction coefficients and wave forces from Velocity Potential</li> <li>How to determine Velocity Potential</li> </ul>	Ch. 7
<p><b>Motion Response in irregular waves:</b></p> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum with forward speed</li> <li>Determine probability of exceedence</li> <li>Make down time analysis using wave spectra, scatter diagram and RAO's</li> </ul>	Ch. 8
<p><b>Structural aspects:</b></p> <ul style="list-style-type: none"> <li>Calculate internal forces and bending moments due to waves</li> </ul>	Ch. 8
<p><b>Nonlinear behavior:</b></p> <ul style="list-style-type: none"> <li>Calculate mean horizontal wave force on wall</li> <li>Use of time domain motion equation</li> </ul>	Ch.6

## Learning goals Module II, behavior of floating bodies in waves

<ul style="list-style-type: none"> <li>• Definition of ship motions</li> </ul> <p><b>Motion Response in regular waves:</b></p> <ul style="list-style-type: none"> <li>• How to use RAO's</li> <li>• Understand the terms in the equation of motion: hydrodynamic reaction forces, wave exciting forces</li> <li>• How to solve RAO's from the equation of motion</li> </ul> <p><b>Motion Response in irregular waves:</b></p> <ul style="list-style-type: none"> <li>• How to determine response in irregular waves from RAO's and wave spectrum without forward speed</li> </ul>	Ch. 6
<p><b>3D linear Potential Theory</b></p> <ul style="list-style-type: none"> <li>• How to determine hydrodynamic reaction coefficients and wave forces from Velocity Potential</li> <li>• How to determine Velocity Potential</li> </ul>	Ch. 7
<p><b>Motion Response in irregular waves:</b></p> <ul style="list-style-type: none"> <li>• How to determine response in irregular waves from RAO's and wave spectrum with forward speed</li> <li>• Determine probability of exceedence</li> <li>• Make down time analysis using wave spectra, scatter diagram and RAO's</li> </ul>	Ch. 8
<p><b>Structural aspects:</b></p> <ul style="list-style-type: none"> <li>• Calculate internal forces and bending moments due to waves</li> </ul>	Ch. 8
<p><b>Nonlinear behavior:</b></p> <ul style="list-style-type: none"> <li>• Calculate mean horizontal wave force on wall</li> <li>• Use of time domain motion equation</li> </ul>	Ch. 6

## 2D Potential theory (strip theory) p. 7-12 until p. 7-35 SKIP THIS PART

## Calculating hydrodynamic coefficients and diffraction force

$$(m + a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w = F_{FK} + F_D$$

$m$  and  $c$  = piece of cake

$F_{FK}$  = almost easy

$a$ ,  $b$ , and  $F_D$  = kind of difficult → Ch. 7

## Calculating hydrodynamic coefficients and diffraction force

p7-4 course notes

$$m \cdot \ddot{z} = \sum F = \underbrace{F_{r3}}_{\text{Radiation: } -a_3 \cdot \ddot{z} - b_3 \cdot \dot{z}} + \underbrace{F_{w3}}_{\text{Incoming wave}} + \underbrace{F_{d3}}_{\text{Diffraction}} + \underbrace{F_{s3}}_{\text{Hydrostatic buoyancy: } -c_3 \cdot z}$$

$$(m + a) \ddot{z} + b \dot{z} + c z = F_{w3} + F_{d3}$$

Next slides we'll consider the left hand side of this motion equation: we will try to write the hydrodynamic reaction force  $F_r$  that the structure feels as a result of its motions in such a way that we can incorporate them in the well known motion equation of a damped mass-spring system.

### Calculating hydrodynamic coefficients and diffraction force

$$m \cdot \ddot{z} = \sum F = \underbrace{F_{r3}}_{\text{Radiation}} + F_{w3} + F_{d3} + F_{s3}$$

Radiation Force:  $F_{r3} = -a_3 \cdot \ddot{z} - b_3 \cdot \dot{z}$

To calculate force: first describe fluid motions due to given heave motion by means of radiation potential:

### Potential theory

Radiation potential  $(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w + F_d$

Radiation potential heave  $\Phi_3(x, y, z, t)$

= flow due to heave motion

Knowing the potential, calculating resulting force is straight forward:

$$\left. \begin{aligned} \bar{F} &= - \iint_S (p \cdot \bar{n}) dS \\ \bar{M} &= - \iint_S p \cdot (\bar{r} \times \bar{n}) dS \\ p &= -\rho \frac{\partial \Phi}{\partial t} \end{aligned} \right\} \begin{aligned} \bar{F} &= \iint_S \left( \rho \frac{\partial \Phi}{\partial t} \cdot \bar{n} \right) dS \\ \bar{M} &= \iint_S \rho \frac{\partial \Phi}{\partial t} \cdot (\bar{r} \times \bar{n}) dS \end{aligned}$$

### Potential theory

Radiation potential  $(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_w + F_d$

Radiation potential heave  $\Phi_3(x, y, z, t)$

= flow due to motions, larger motions → 'more' flow

**Problem:** But we don't know the motions !! (we need the flow to calculate the motions...and we need the motions to calculate the flow...)

**Solution:** radiation potential is written as function of motion:

### Potential theory

Radiation potential

**Solution:** radiation potential is written as function of *velocity of the motion*

$$\Phi_3(x, t) = \Re \{ \underbrace{\phi_3(x)}_{\text{Only space dependent}} \cdot \underbrace{v_3(t)}_{\text{Only time dependent}} \} \quad \text{P7-5 eq. 7.17}$$

Suppose we would know the velocity potential due to heave motion:  $\Phi_3$   
Assuming linearity this will be a harmonic function with:  
- the same frequency as the harmonic motion  
- A certain (space dependent) amplitude  
- A certain (space dependent) phase angle  
Let's define the amplitude and the phase angle of this potential function to be related to the velocity of the heave motion ( $\dot{z}$  or in complex notation:  $v_3$ ).  
So we write the potential function  $\Phi_3$  as a complex product of:  
 $\phi_3$  (which can be considered as a complex transfer function between potential and heave velocity) and the heave velocity  $v_3$

### Potential theory

Radiation potential

$$\Phi_3(x, t) = \Re \{ \underbrace{\phi_3(x)}_{\text{Only space dependent}} \cdot \underbrace{v_3(t)}_{\text{Only time dependent}} \}$$

Complex notation:

$$s_3(t) = s_{a3} \cdot e^{-i\omega t}$$

$$v_3(t) = \dot{s}_3(t) = -i\omega s_{a3} \cdot e^{-i\omega t}$$

$s_{a3}$  Complex heave motion amplitude

$$z(t) = z_a \cos(\omega t + \varepsilon_{z,\zeta}) = \Re \{ \underbrace{z_a e^{-i\varepsilon_{z,\zeta}}}_{\text{Complex heave motion amplitude}} e^{-i\omega t} \} = \Re \{ s_{a3} e^{-i\omega t} \}$$

$$v_3(t) = \underbrace{-i\omega z_a e^{-i\varepsilon_{z,\zeta}}}_{\text{Complex heave velocity amplitude}} e^{-i\omega t} = -i\omega s_{a3} e^{-i\omega t}$$

$v_{a3}$  Complex heave velocity amplitude

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 113  
Marine Engineering, Ship Hydromechanics Section

### Potential theory

Let's consider Heave motion:

$$\Phi_3(x, t) = \Re \{ \phi_3 \cdot v_{a3} \cdot e^{-i\omega t} \} = \Re \{ \phi_3 \cdot \underbrace{-i\omega \cdot s_{a3} \cdot e^{-i\omega t}}_{v_3(t)} \}$$

$v_{a3}$  = complex amplitude of heave velocity  
 $s_{a3}$  = complex amplitude of heave displacement

Potential not necessarily in phase with heave velocity  $v_3 \rightarrow$

$\phi_3$  = complex amplitude of heave radiation potential (devided by  $-i\omega s_{a3}$ )

Remember:  
 $\Phi_3$  will be a harmonic function with:  
 - the same frequency as the harmonic motion  
 - A certain (space dependent) amplitude  
 - A certain (space dependent) phase angle

Suppose that at a certain location, this function has a phase angle  $\varepsilon$  related to the heave velocity and the ratio between its amplitude and the amplitude of the heave velocity is  $a$ .

Verify that in that case:  
 $\phi_3 = a e^{-i\varepsilon}$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 114  
Marine Engineering, Ship Hydromechanics Section

### Potential theory

Let's consider forces and moments due to heave motion

$$\bar{F}_{r3} = \iint_S \left( \rho \frac{\partial \Phi_3}{\partial t} \cdot \bar{n} \right) dS$$

$$\bar{M}_{r3} = \iint_S \rho \frac{\partial \Phi_3}{\partial t} \cdot (\bar{r} \times \bar{n}) dS$$

$$\bar{F}_{r3} = \iint_S \left( \rho \frac{\partial (\phi_3 \cdot -i\omega \cdot s_{a3} \cdot e^{-i\omega t})}{\partial t} \cdot \bar{n} \right) dS$$

$$\bar{M}_{r3} = \iint_S \rho \frac{\partial (\phi_3 \cdot -i\omega \cdot s_{a3} \cdot e^{-i\omega t})}{\partial t} \cdot (\bar{r} \times \bar{n}) dS$$

$\Phi_3(x, t) = \phi_3 \cdot v_{a3} \cdot e^{-i\omega t} = \phi_3 \cdot -i\omega \cdot s_{a3} \cdot e^{-i\omega t}$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 115  
Marine Engineering, Ship Hydromechanics Section

### Potential theory

some re writing, considering only heave force due to heave motion:

$$F_{r33} = \Re \left\{ \iint_S \left( \rho \frac{\partial (\phi_3 \cdot -i\omega \cdot s_{a3} \cdot e^{-i\omega t})}{\partial t} \cdot n_3 \right) dS \right\}$$

Only space dependent      Only time dependent

$$= \Re \left\{ -\rho \cdot i\omega \cdot s_{a3} \cdot \iint_S \phi_3 \cdot \frac{\partial (e^{-i\omega t})}{\partial t} \cdot n_3 \cdot dS \right\}$$

$$= \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \cdot \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\}$$

This 3 component force vector  $\bar{F}$  is what we call the hydrodynamic reaction force that the structure experiences due to its heave motion.

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 116  
Marine Engineering, Ship Hydromechanics Section

## Potential theory

Radiation Force due to heave motion is 3 component vector:

$$F_{r13} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_1 \cdot dS \cdot e^{-i\omega t} \right\} \quad \text{Surge force due to heave motion}$$


$$F_{r23} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_2 \cdot dS \cdot e^{-i\omega t} \right\} \quad \text{Sway force due to heave motion}$$

$$F_{r33} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\} \quad \text{Heave force due to heave motion}$$

In the following, only heave force due to heave motion is considered:  $F_{r33}$

## Potential theory

Radiation potential

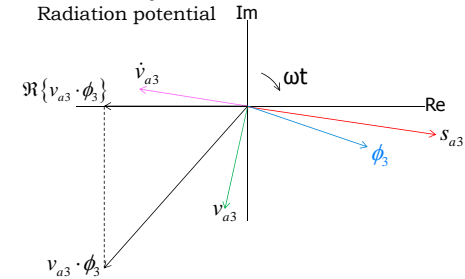


$$F_{r33} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\} \quad = \text{Radiation force in heave direction, due to heave motion}$$

$$m \cdot \ddot{z} + c \cdot \dot{z} + F_{r33} = F_{w3} + F_{d3} =$$

$$m \cdot \dot{v}_{a3} \cdot e^{-i\omega t} + c \cdot s_{a3} \cdot e^{-i\omega t} + F_{r33}$$

## Potential theory

Radiation potential

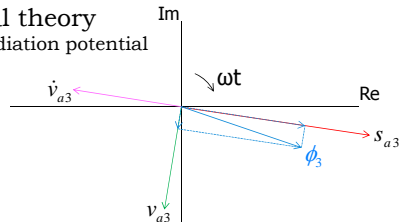

$$F_{r33} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\} \quad = \text{Radiation force in heave direction, due to heave motion}$$

$$m \cdot \ddot{z} + c \cdot \dot{z} + F_{r33} = F_{w3} + F_{d3}$$

$$\Re \left\{ m \cdot \dot{v}_{a3} \cdot e^{-i\omega t} + c \cdot s_{a3} \cdot e^{-i\omega t} + F_{r33} \right\} = F_{w3} + F_{d3}$$

$$-a \cdot \ddot{z} =$$


$$\Re \left\{ -a \cdot \dot{v}_{a3} \cdot e^{-i\omega t} \right\}$$

$$-b \cdot \dot{z} =$$

$$\Re \left\{ -b \cdot v_{a3} \cdot e^{-i\omega t} \right\}$$

## Potential theory

Radiation potential

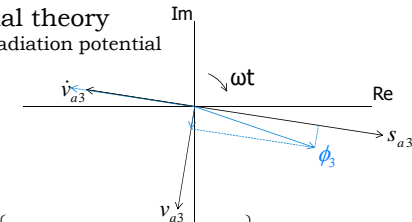

$$F_{r33} = \Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\} = \Re \left\{ -a \cdot \dot{v}_{a3} \cdot e^{-i\omega t} - b \cdot v_{a3} \cdot e^{-i\omega t} \right\}$$

$$= \Re \left\{ a \cdot \omega^2 \cdot s_{a3} \cdot e^{-i\omega t} + b \cdot i\omega \cdot s_{a3} \cdot e^{-i\omega t} \right\}$$

$$= \Re \left\{ a\omega^2 \cdot s_{a3} \cdot e^{-i\omega t} + ib\omega \cdot s_{a3} \cdot e^{-i\omega t} \right\}$$

$$\Re \left\{ -\rho \cdot \omega^2 \cdot s_{a3} \iint_S \phi_3 \cdot n_3 \cdot dS \cdot e^{-i\omega t} \right\} = \Re \left\{ a\omega^2 \cdot s_{a3} \cdot e^{-i\omega t} + ib\omega \cdot s_{a3} \cdot e^{-i\omega t} \right\}$$

### Potential theory

#### Radiation potential

$$= \Re \left\{ -\rho \cdot \omega^2 \cdot \int_S \phi_3 \cdot n_3 \cdot dS \cdot e^{j\omega t} \right\} = \Re \left\{ a\omega^2 \cdot \int_S \phi_3 \cdot n_3 \cdot dS + ib\omega \cdot \int_S \phi_3 \cdot n_3 \cdot dS \right\}$$

After dividing by  $S_{a3} \cdot e^{-i\omega t}$   
Both Im and Re part have to be equalled!

$$- \rho \omega^2 \int_S \phi_3 \cdot n_3 \cdot dS = a\omega^2 + ib\omega$$

$$a = -\rho \Re \left\{ \int_S \phi_3 \cdot n_3 \cdot dS \right\}$$

$$b = -\rho \omega \Im \left\{ \int_S \phi_3 \cdot n_3 \cdot dS \right\}$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 121  
Marine Engineering, Ship Hydromechanics Section

### Potential theory

#### resulting from heave motions, $\Phi_3$

Forces	Moments
$a_{33} = -\Re \left\{ \rho \int_S \phi_3 \cdot n_3 \cdot dS_0 \right\}$	$a_{43} = -\Re \left\{ \rho \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_1 \cdot dS_0 \right\}$
$b_{33} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot n_3 \cdot dS_0 \right\}$	$b_{43} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_1 \cdot dS_0 \right\}$
$a_{13} = -\Re \left\{ \rho \int_S \phi_3 \cdot n_1 \cdot dS_0 \right\}$	$a_{53} = -\Re \left\{ \rho \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_2 \cdot dS_0 \right\}$
$b_{13} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot n_1 \cdot dS_0 \right\}$	$b_{53} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_2 \cdot dS_0 \right\}$
$a_{23} = -\Re \left\{ \rho \int_S \phi_3 \cdot n_2 \cdot dS_0 \right\}$	$a_{63} = -\Re \left\{ \rho \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_3 \cdot dS_0 \right\}$
$b_{23} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot n_2 \cdot dS_0 \right\}$	$b_{63} = -\Im \left\{ \rho \omega \int_S \phi_3 \cdot (\vec{r} \times \vec{n})_3 \cdot dS_0 \right\}$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 122  
Marine Engineering, Ship Hydromechanics Section

### Solving the Laplace equation

coupled equation of motion:

$$\begin{pmatrix} M + a_{11} & a_{12} & a_{13} & a_{14} & a_{15} & a_{16} \\ a_{21} & M + a_{22} & a_{23} & a_{24} & a_{25} & a_{26} \\ a_{31} & a_{32} & M + a_{33} & a_{34} & a_{35} & a_{36} \\ a_{41} & a_{42} & a_{43} & I_{xx} + a_{44} & a_{45} & a_{46} \\ a_{51} & a_{52} & a_{53} & a_{54} & I_{yy} + a_{55} & a_{56} \\ a_{61} & a_{62} & a_{63} & a_{64} & a_{65} & I_{zz} + a_{66} \end{pmatrix} \begin{pmatrix} \dot{x} \\ \dot{y} \\ \dot{z} \\ \dot{\phi} \\ \dot{\theta} \\ \dot{\psi} \end{pmatrix} + \begin{pmatrix} b_{11} & b_{12} & b_{13} & b_{14} & b_{15} & b_{16} \\ b_{21} & b_{22} & b_{23} & b_{24} & b_{25} & b_{26} \\ b_{31} & b_{32} & b_{33} & b_{34} & b_{35} & b_{36} \\ b_{41} & b_{42} & b_{43} & b_{44} & b_{45} & b_{46} \\ b_{51} & b_{52} & b_{53} & b_{54} & b_{55} & b_{56} \\ b_{61} & b_{62} & b_{63} & b_{64} & b_{65} & b_{66} \end{pmatrix} \begin{pmatrix} x \\ y \\ z \\ \phi \\ \theta \\ \psi \end{pmatrix} = \begin{pmatrix} F_x \\ F_y \\ F_z \\ M_x \\ M_y \\ M_z \end{pmatrix}$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 123  
Marine Engineering, Ship Hydromechanics Section

### Hydrostatic heave – pitch coupling

#### Which statement is true?

- $c_{53}=0$  only if geometry of submerged vessel has fore-aft symmetry (wrt origin)
- $c_{53}=0$  if B and G are aligned
- $c_{53}=0$  if G and F are aligned
- Both B and C are true
- Both A, B and C are false



TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 124  
Marine Engineering, Ship Hydromechanics Section



### Hydrostatic heave – pitch coupling

Which statement is true?



- A.  $c_{53}=0$  only if geometry of submerged vessel has fore-aft symmetry (wrt origin)
- B.  $c_{53}=0$  if B and G are aligned
- C.  $c_{53}=0$  if G and F are aligned
- D. Both B and C are true
- E. Both A, B and C are false

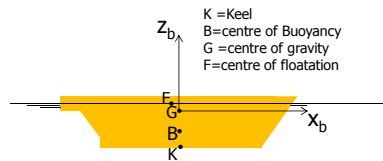

### Hydrostatic surge-heave coupling

Which statement is true?



- A.  $c_{13}=0$  only if the submerged geometry of the vessel has fore-aft symmetry (wrt origin)
- B.  $c_{13}=0$  regardless of geometry
- C. Both A and B are false

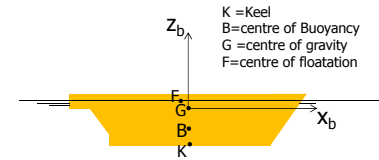

### Hydrostatic surge-heave coupling

Which statement is true?



- A.  $c_{13}=0$  only if the submerged geometry of the vessel has fore-aft symmetry (wrt origin)
- B.  $c_{13}=0$  regardless of geometry
- C. Both A and B are false

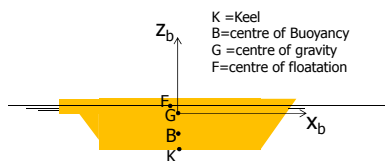

### Hydrodynamic heave-pitch coupling

Which statement is true?


- A.  $a_{53}=0$  only if the submerged geometry of the vessel has fore-aft symmetry (wrt origin)
- B.  $a_{53}=0$  regardless of geometry
- C. Both A and B are false

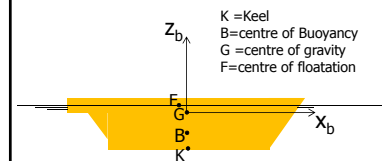

## Hydrodynamic heave-pitch coupling

Which statement is true?

- A.  $a_{53}=0$  only if the submerged geometry of the vessel has fore-aft symmetry (wrt origin)
- B.  $a_{53}=0$  regardless of geometry
- C. Both A and B are false

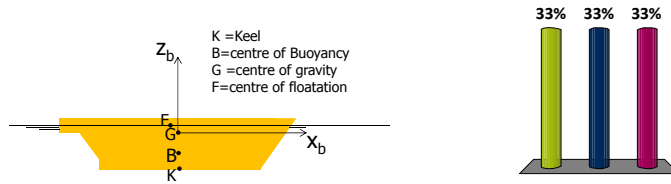

## Hydrodynamic sway-roll coupling

Which statement is true?


- A.  $a_{42}=0$  only if the submerged geometry of the vessel has SB-PS symmetry
- B.  $a_{42}=0$  regardless of geometry
- C. Both A and B are false



## Hydrodynamic sway-roll coupling

Which statement is true?

- A.  $a_{42}=0$  only if the submerged geometry of the vessel has SB-PS symmetry
- B.  $a_{42}=0$  regardless of geometry
- C. Both A and B are false

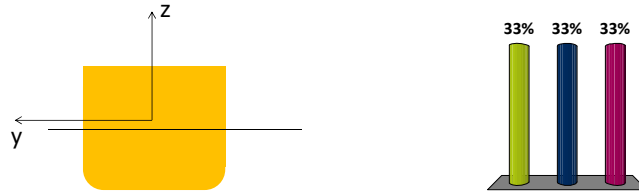

## Potential theory

### Recap Radiation potential

$$\Phi_3(x, t) = \Re \{ \phi_3(x) \cdot v_3(t) \} \quad \text{P7-5 eq. 7.17}$$

Only space dependent

Only time dependent

Suppose we would know the velocity potential due to heave motion:  $\Phi_3$   
Assuming linearity this will be a harmonic function with:

- the same frequency as the harmonic motion
- A certain (space dependent) amplitude
- A certain (space dependent) phase angle

Let's define the amplitude and the phase angle of this potential function to be related to the velocity of the heave motion ( $\dot{z}$  or in complex notation:  $v_3$ ).

So we write the potential function  $\Phi_3$  as a complex product of:

$\phi_3$  (which can be considered as a complex transfer function between potential and heave velocity) and the heave velocity  $v_3$

## Potential theory

### Radiation potential

$$a_{33} = -\rho \Re \left\{ \iint_S \phi_3 \cdot n_3 \cdot dS \right\}$$

$$b_{33} = -\rho \omega \Im \left\{ \iint_S \phi_3 \cdot n_3 \cdot dS \right\}$$

## Potential theory

### resulting from heave motions, $\Phi_3$

#### Forces

$$a_{33} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot n_3 \cdot dS_0 \right\}$$

$$b_{33} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot n_3 \cdot dS_0 \right\}$$

$$a_{13} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot n_1 \cdot dS_0 \right\}$$

$$b_{13} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot n_1 \cdot dS_0 \right\}$$

$$a_{23} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot n_2 \cdot dS_0 \right\}$$

$$b_{23} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot n_2 \cdot dS_0 \right\}$$

#### Moments

$$a_{43} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_1 \cdot dS_0 \right\}$$

$$b_{43} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_1 \cdot dS_0 \right\}$$

$$a_{53} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_2 \cdot dS_0 \right\}$$

$$b_{53} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_2 \cdot dS_0 \right\}$$

$$a_{63} = -\Re \left\{ \rho \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_3 \cdot dS_0 \right\}$$

$$b_{63} = -\Im \left\{ \rho \omega \iint_{S_0} \phi_3 \cdot (\vec{r} \times \vec{n})_3 \cdot dS_0 \right\}$$

## Solving the Laplace equation

coupled equation of motion:

$$\begin{bmatrix} M + a_{11} & a_{12} & a_{13} & a_{14} & a_{15} & a_{16} \\ a_{21} & M + a_{22} & a_{23} & a_{24} & a_{25} & a_{26} \\ a_{31} & a_{32} & M + a_{33} & a_{34} & a_{35} & a_{36} \\ a_{41} & a_{42} & a_{43} & I_{xx} + a_{44} & a_{45} & a_{46} \\ a_{51} & a_{52} & a_{53} & a_{54} & I_{yy} + a_{55} & a_{56} \\ a_{61} & a_{62} & a_{63} & a_{64} & a_{65} & I_{zz} + a_{66} \end{bmatrix} \begin{bmatrix} \dot{x} \\ \dot{y} \\ \dot{z} \\ \dot{\varphi} \\ \dot{\theta} \\ \dot{\psi} \end{bmatrix} + \begin{bmatrix} b_{11} & b_{12} & b_{13} & b_{14} & b_{15} & b_{16} \\ b_{21} & b_{22} & b_{23} & b_{24} & b_{25} & b_{26} \\ b_{31} & b_{32} & b_{33} & b_{34} & b_{35} & b_{36} \\ b_{41} & b_{42} & b_{43} & b_{44} & b_{45} & b_{46} \\ b_{51} & b_{52} & b_{53} & b_{54} & b_{55} & b_{56} \\ b_{61} & b_{62} & b_{63} & b_{64} & b_{65} & b_{66} \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ \varphi \\ \theta \\ \psi \end{bmatrix} = \begin{bmatrix} c_{11} & c_{12} & c_{13} & c_{14} & c_{15} & c_{16} \\ c_{21} & c_{22} & c_{23} & c_{24} & c_{25} & c_{26} \\ c_{31} & c_{32} & c_{33} & c_{34} & c_{35} & c_{36} \\ c_{41} & c_{42} & c_{43} & c_{44} & c_{45} & c_{46} \\ c_{51} & c_{52} & c_{53} & c_{54} & c_{55} & c_{56} \\ c_{61} & c_{62} & c_{63} & c_{64} & c_{65} & c_{66} \end{bmatrix} \begin{bmatrix} F_x \\ F_y \\ F_z \\ M_x \\ M_y \\ M_z \end{bmatrix}$$

## Potential theory

Now let's consider the right hand side of the motion equation: the excitation forces that the structure feels due to the waves.



Radiation potential  $\Phi_{1, \dots, 6}$

Boundary Condition:  $\frac{\partial \Phi_{1, \dots, 6}}{\partial n} = v_n$



Undisturbed wave potential  $\Phi_0$   
Diffraction potential  $\Phi_7$

Boundary Condition:  $\frac{\partial \Phi_0}{\partial n} + \frac{\partial \Phi_7}{\partial n} = 0$

Calculating hydrodynamic coefficient and diffraction force

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W = F_{FK} + F_D$$

1. Undisturbed wave force (Froude-Krilov)  
Potential is known from Ch. 5:
2. Diffraction force

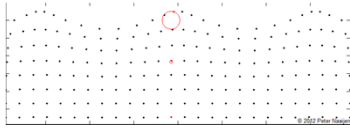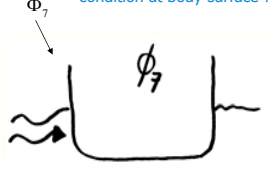Has to be solved. What is boundary condition at body surface ?

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 137  
Marine Engineering, Ship Hydromechanics Section

Calculating hydrodynamic coefficient and diffraction force

$$F_{FK} + F_D$$

Linear relation between undisturbed wave and diffraction potential →

$$\Phi_7 = \phi_7 \cdot \dot{\zeta} = \phi_7 \cdot -i\omega \cdot \zeta_a \cdot e^{-i\omega t} = \phi_7 \cdot -i\omega \cdot \zeta_0 \cdot e^{-i\omega t}$$

Notation p 7-39, 7-40:

$$\zeta_0 = \zeta_7 = \text{amplitude undisturbed wave (at origin, so real)}$$

$$\zeta_{1..6} = \text{amplitude motions (complex)}$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 138  
Marine Engineering, Ship Hydromechanics Section

Calculating hydrodynamic coefficient and diffraction force

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = F_W = F_{FK} + F_D$$

Undisturbed wave force (Froude-Krilov)

$$\zeta = \zeta_a \cos(kx \cos(\mu) + ky \sin(\mu) - \omega t)$$

$$\Phi_0 = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx \cos(\mu) + ky \sin(\mu) - \omega t)$$

$$= \Re \left\{ -i \frac{\zeta_0 g}{\omega} \cdot e^{kz} \cdot e^{i(kx \cos(\mu) + ky \sin(\mu) - \omega t)} \right\}$$

Analogie to the radiation potential we write the known undisturbed wave potential function as a transfer function  $\phi_0$  multiplied with the velocity of the undisturbed wave elevation at the origin of the axes system.

$$= \Re \left\{ -i\omega \cdot \frac{g}{\omega^2} \cdot e^{kz} \cdot e^{i(kx \cos(\mu) + ky \sin(\mu))} \cdot \zeta_0 \cdot e^{-i\omega t} \right\}$$

$$= \Re \left\{ \phi_0 \cdot (-i\omega \cdot \zeta_0 \cdot e^{-i\omega t}) \right\}$$

Velocity of wave elevation at origin of axes system (COG) in complex notation

Error p.7-39 eq. 7.151!!

$$\phi_0(x, y, z) = \frac{g}{\omega^2} e^{kz} \cdot e^{i(kx \cos(\mu) + ky \sin(\mu))}$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 139  
Marine Engineering, Ship Hydromechanics Section

Calculating hydrodynamic coefficient and diffraction force

$$\Phi_0 = \frac{\zeta_a g}{\omega} \cdot e^{kz} \cdot \sin(kx \cos(\mu) + ky \sin(\mu) - \omega t)$$

$$= \Re \left\{ \phi_0(x) \cdot \dot{\zeta}(t) \right\}$$

Velocity of wave elevation at origin of axes system (COG) in complex notation

$$\phi_0(x, y, z) = \frac{g}{\omega^2} e^{kz} \cdot e^{i(kx \cos(\mu) + ky \sin(\mu))}$$

$$\dot{\zeta}(t) = -i\omega \cdot \zeta_0 \cdot e^{-i\omega t}$$

TU Delft OE4630 2012-2013, Offshore Hydromechanics, Part 2 SESSION ID 140  
Marine Engineering, Ship Hydromechanics Section

## Calculating hydrodynamic coefficient and diffraction force

Same for diffraction potential:

$$\Phi_7 = \Re\{\phi_7(\underline{x}) \cdot \dot{\zeta}(t)\}$$

$$\phi_7 = ?$$

$$\dot{\zeta}(t) = -i\omega \cdot \zeta_0 \cdot e^{-i\omega t}$$

## Calculating hydrodynamic coefficient and diffraction force

$$(m+a) \cdot \ddot{z} + b \cdot \dot{z} + c \cdot z = \underbrace{F_W = F_{FK} + (F_D)}_{\text{circled}}$$

Analogue to the radiation potential we write the known undisturbed wave potential function as a transfer function  $\phi_0$  multiplied with the velocity of the undisturbed wave elevation at the origin of the axes system.

We also do this for the unknown diffraction potential whose transfer function we call  $\phi_7$ .

$$\Phi_0 + \Phi_7 = -i\omega \cdot (\phi_0 + \phi_7) \cdot \zeta_0 \cdot e^{-i\omega t}$$

Pressure:

$$p_w = -\rho \frac{\partial(\Phi_0 + \Phi_7)}{\partial t} = \rho\omega^2 \cdot (\phi_0 + \phi_7) \cdot \zeta_0 \cdot e^{-i\omega t}$$

= pressure due to incoming and diffracted wave

## Potential Theory

Forces and moments can be derived from pressures:

$$\vec{F} = -\iint_S (p \cdot \vec{n}) dS$$

$$\vec{M} = -\iint_S p \cdot (\vec{r} \times \vec{n}) dS$$

Knowing the potentials, pressures due to incoming and diffracted wave can be determined. Integrating these acc to the equations here finally gives the wave exciting forces.

## Learning goals Module II, behavior of floating bodies in waves

<ul style="list-style-type: none"> <li>Definition of ship motions</li> </ul>	Ch.6
<b>Motion Response in regular waves:</b> <ul style="list-style-type: none"> <li>How to use RAO's</li> <li>Understand the terms in the equation of motion: hydrodynamic reaction forces, wave exciting forces</li> <li>How to solve RAO's from the equation of motion</li> </ul>	
<b>Motion Response in irregular waves:</b> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum without forward speed</li> </ul>	
<b>3D linear Potential Theory</b> <ul style="list-style-type: none"> <li>How to determine hydrodynamic reaction coefficients and wave forces from Velocity Potential</li> <li>How to determine Velocity Potential</li> </ul>	Ch. 7
<b>Motion Response in irregular waves:</b> <ul style="list-style-type: none"> <li>How to determine response in irregular waves from RAO's and wave spectrum with forward speed</li> <li>Determine probability of exceedence</li> <li>Make down time analysis using wave spectra, scatter diagram and RAO's</li> </ul>	Ch. 8
<b>Structural aspects:</b> <ul style="list-style-type: none"> <li>Calculate internal forces and bending moments due to waves</li> </ul>	Ch. 8
<b>Nonlinear behavior:</b> <ul style="list-style-type: none"> <li>Calculate mean horizontal wave force on wall</li> <li>Use of time domain motion equation</li> </ul>	Ch.6


## Potential Theory

$$\frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} + \frac{\partial^2 \Phi}{\partial z^2} = 0$$

So this is the differential equation we have to solve

What are the boundary conditions ?


## Potential Theory



Boundary Conditions:

- **At sea bottom:** Sea bed is watertight
- **At free surface:**
  - $p = p_{\text{atmospheric}}$  (dynamic bc)
  - Water particles cannot leave free surface (kinematic bc)
- **At ship hull:** ship is watertight (that's what it's a ship for isn't it!)
- **Far far away from the ship:** no disturbances due to the ship's presence

## Potential Theory



Boundary Conditions:


- **At sea bottom:** Sea bed is watertight  $\frac{\partial \Phi}{\partial n} = 0$  at  $z = -h$
- **At free surface:**
  - $p = p_{\text{atmospheric}}$  (dynamic bc)
  - Water particles cannot leave free surface (kinematic bc)
$$\frac{\partial^2 \Phi}{\partial t^2} + g \frac{\partial \Phi}{\partial z} = 0$$
 at  $z = 0$
- **At ship hull:** ship is watertight (that's what it's a ship for!)  $\frac{\partial \Phi}{\partial n} = v_n$  at  $S_0$
- **Far far away from the ship:** no disturbances due to the ship's presence  $\lim_{R \rightarrow \infty} \Phi = 0$

## Solving the Laplace equation

Q: How to create the potential flows ?

A: Use of basic potential flow elements: *source-sheet* on the hull



Recall Ch. 3: *point source*  
3D



$$\text{Source: } \phi = \frac{-\sigma}{4\pi r}, v_r = \frac{\sigma}{4\pi r^2}$$



Sink  $\sigma$  is negative



## Solving the Laplace equation

Q: How to determine the potential using a source sheet on the ship's hull ?  
 A: Use of 'Green's function'


$$\phi_j(x, y, z) = \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot G(x, y, z, \hat{x}, \hat{y}, \hat{z}) dS_0$$

Complex amplitude of potential in point  $(x, y, z)$

Source strength at  $(\hat{x}, \hat{y}, \hat{z})$

Green's function: influence on potential at  $(x, y, z)$  by source located at  $(\hat{x}, \hat{y}, \hat{z})$

Mean wetted hull surface

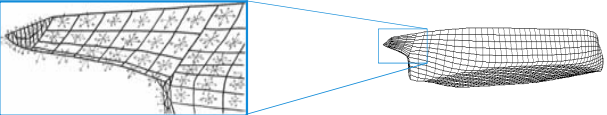

## Solving the Laplace equation

Q: How to determine the potential using a source sheet on the ship's hull ?  
 A: Use of 'Green's function'

$$\phi_j(x, y, z) = \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot G(x, y, z, \hat{x}, \hat{y}, \hat{z}) dS_0$$

Green's function: influence on potential at  $(x, y, z)$  by source at  $(\hat{x}, \hat{y}, \hat{z})$

- Satisfies the boundary condition at the free surface
  - Satisfies the boundary condition at the sea bed
- } Relaxed!

P 7-42 formulae for G

## Solving the Laplace equation

So:

- Potential field is created by source sheet on ship's hull surface
- The source sheet is a basic potential flow element and a solution of the Laplace equation
- Potential at certain location is influenced by whole source distribution
- This influence is defined by the Green's function
- This Green's function also takes care of satisfying the sea-bed and free surface b.c.
- The source distribution also satisfies the radiation condition (effect of source vanishes at large distance from source)
- Only b.c. left is that at the hull surface

## Solving the Laplace equation

Why do we only need to consider the complex amplitude  $(\phi(x, y, z))$  instead of  $\phi(x, y, z, t)$ ?

Let's consider diffraction potential BC:

$$\left. \begin{aligned} \frac{\partial \Phi_0}{\partial n} + \frac{\partial \Phi_7}{\partial n} &= 0 \\ \Phi_0 &= \Re \{ \phi_0(\underline{x}) \cdot \zeta(t) \} \\ \phi_0(x, y, z) &= \frac{g}{\omega^2} e^{kz} \cdot e^{i(kx \cos(\mu) + ky \sin(\mu))} \\ \zeta(t) &= -i\omega \cdot \zeta_0 \cdot e^{-i\omega t} \\ \Phi_7 &= \Re \{ \phi_7(\underline{x}) \cdot \zeta(t) \} \\ \phi_7 &= ? \end{aligned} \right\} \begin{aligned} \frac{\partial \Phi_0}{\partial n} + \frac{\partial \Phi_7}{\partial n} &= 0 \rightarrow \\ \frac{\partial \Re \{ \phi_0(\underline{x}) \cdot \zeta(t) \}}{\partial n} + \frac{\partial \Re \{ \phi_7(\underline{x}) \cdot \zeta(t) \}}{\partial n} &= 0 \rightarrow \\ \frac{\partial \phi_0}{\partial n} + \frac{\partial \phi_7}{\partial n} &= 0 \end{aligned}$$

## Solving the Laplace equation

How to make sure the potential satisfies the b.c. at the hull surface ?

$$\phi_j(x, y, z) = \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot G(x, y, z, \hat{x}, \hat{y}, \hat{z}) dS_0$$

For example: diffraction potential

$$\frac{\partial \left( \frac{g}{\omega^2} \cdot e^{kz} \cdot e^{ik(x \cos \mu + y \sin \mu)} \right)}{\partial n} + \frac{\partial \phi_j}{\partial n} = 0$$

Complex amplitude of normal velocity due to diffraction potential at  $(\hat{x}, \hat{y}, \hat{z})$

Complex amplitude of Normal velocity due to undisturbed wave potential at  $(x, y, z)$

Source strength  $\sigma_j$  has to be calculated so that this equation is satisfied !!!


## Solving the Laplace equation

How to make sure the potential satisfies the b.c. at the hull surface ?

$$\frac{\partial(\phi_0)}{\partial n}(x, y, z) + \frac{\partial \left( \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot G(x, y, z, \hat{x}, \hat{y}, \hat{z}) dS_0 \right)}{\partial n} = 0$$

$$\frac{\partial(\phi_0)}{\partial n}(x, y, z) + \frac{1}{2} \sigma_j(x, y, z) + \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot \frac{\partial G(x, y, z, \hat{x}, \hat{y}, \hat{z})}{\partial n} dS_0 = 0$$

Source strength  $\sigma_j$  (as a function of the location on the hull) has to be calculated so that this equation is satisfied



## Solving the Laplace equation

$$\frac{\partial(\phi_0)}{\partial n}(x, y, z) + \frac{1}{2} \sigma_j(x, y, z) + \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot \frac{\partial G(x, y, z, \hat{x}, \hat{y}, \hat{z})}{\partial n} dS_0 = 0$$

Contribution of source at  $(x, y, z)$  where  $r = 0$

Contribution of all surrounding source sheet  
(Principle Value Integral)




## Solving the Laplace equation numerical approach

$$\frac{\partial(\phi_0)}{\partial n}(x, y, z) + \frac{1}{2} \sigma_j(x, y, z) + \frac{1}{4\pi} \iint_{S_0} \sigma_j(\hat{x}, \hat{y}, \hat{z}) \cdot \frac{\partial G(x, y, z, \hat{x}, \hat{y}, \hat{z})}{\partial n} dS_0 = 0$$

$\frac{\partial \phi_j}{\partial n}$

**PROBLEM:** there is no analytical description of the hull surface  $S_0$

**SOLUTION:**






### Solving the Laplace equation numerical approach

$$\frac{\partial(\phi_0)}{\partial n}(x, y, z) - \frac{1}{2}\sigma_7(x, y, z) + \frac{1}{4\pi} \iint_{S_0} \sigma_7(\hat{x}, \hat{y}, \hat{z}) \cdot \frac{\partial G(x, y, z, \hat{x}, \hat{y}, \hat{z})}{\partial n} dS_0 = 0$$

$$-\frac{1}{2}\sigma_{m7}(x, y, z) + \frac{1}{4\pi} \sum_{n=1}^N \sigma_{n7} \cdot \frac{\partial G_{mn}}{\partial n} \Delta S_n = -\left(\frac{\partial(\phi_0)}{\partial n}\right)_m$$




- Centroid of panel m is called collocation point (x,y,z)
- Only here boundary condition is satisfied.
- Every panel has 1 collocation point
- Source strength is constant on each panel
- In summation: n≠m (numerical form of P.V integral)

$$-\frac{1}{2}\sigma_{m7} + \frac{1}{4\pi} \sum_{n=1}^N \sigma_{n7} \cdot \frac{\partial G_{mn}}{\partial n} \Delta S_n = -\left(\frac{\partial(\phi_0)}{\partial n}\right)_m$$

This equation must be solved for every panel m

Taking into account sources on all other panels

$$\begin{pmatrix} A_{11} & \dots & A_{1N} \\ \vdots & \ddots & \vdots \\ A_{N1} & \dots & A_{NN} \end{pmatrix} \cdot \begin{pmatrix} \sigma_{1,7} \\ \vdots \\ \sigma_{N,7} \end{pmatrix} = \begin{pmatrix} -\left(\frac{\partial(\phi_0)}{\partial n}\right)_1 \\ \vdots \\ -\left(\frac{\partial(\phi_0)}{\partial n}\right)_N \end{pmatrix}$$



$A_{mm} = -\frac{1}{2}$  (influence of source at panel n on  $\frac{\partial\phi_0}{\partial n}$  at its own collocation point)

$A_{mn} = \frac{1}{4\pi} \frac{\partial G_{mn}}{\partial n} \Delta S_n$  (influence of source at panel n on  $\frac{\partial\phi_0}{\partial n}$  at collocation point m)

$\sigma_{n,7}$  = unknown source strength of diffraction potential at panel n

### Potential theory

Radiation potentials

$$\Phi_{rj}(x, t) = \phi_j(x) \cdot v_j(t) = \Re(\phi_j(x) \cdot -i\omega s_{\omega} e^{-i\omega t})$$

Only **space** dependent

Only **time** dependent

Boundary condition at the hull surface:

Flow velocity in normal direction

$$\frac{\partial \Phi_j}{\partial n} = \frac{\partial \phi_j}{\partial n} v_j = v_n = v_j \cdot f_j$$

$$\frac{\partial \phi_j}{\partial n} = f_j$$

Local body velocity in normal direction

- P 7-3
- surge:  $f_1 = \cos(n, x)$
  - sway:  $f_2 = \cos(n, y)$
  - heave:  $f_3 = \cos(n, z)$
  - roll:  $f_4 = y \cos(n, z) - z \cos(n, y)$
  - pitch:  $f_5 = z \cos(n, x) - x \cos(n, z)$
  - yaw:  $f_6 = x \cos(n, y) - y \cos(n, x)$

### Potential theory

Radiation potential

$$\frac{\partial \phi_j}{\partial n} = f_j$$

$$-\frac{1}{2}\sigma_{mj} + \frac{1}{4\pi} \sum_{n=1}^N \sigma_{nj} \cdot \frac{\partial G_{mn}}{\partial n} \Delta S_n = f_{mj}$$

$$\begin{pmatrix} A_{11} & \dots & A_{1N} \\ \vdots & \ddots & \vdots \\ A_{N1} & \dots & A_{NN} \end{pmatrix} \cdot \begin{pmatrix} \sigma_{1,j} \\ \vdots \\ \sigma_{N,j} \end{pmatrix} = \begin{pmatrix} (f_j)_1 \\ \vdots \\ (f_j)_N \end{pmatrix}$$

• j indicates which radiation potential is considered: j = 1...6


•  $A_{mm} = -\frac{1}{2}$  (influence of source at panel n on  $\frac{\partial\phi_j}{\partial n}$  at its own collocation point)

•  $A_{mn} = \frac{1}{4\pi} \frac{\partial G_{mn}}{\partial n} \Delta S_n$  (influence of source at panel n on  $\frac{\partial\phi_j}{\partial n}$  at collocation point m)


•  $\sigma_{n,j}$  = unknown source strength of radiation potential (j=1...6) at panel n

•  $(f_j)_m$  local normal direction due to motion in direction j at panel m

Saving calculation time by use of symmetry



N panels means inverting an  $N \times N$  matrix



How many source strengths have to be calculated to determine 6DOF motion

RAO's for 5 wave directions and 40 frequencies ?

- A 1400 x N
- B 440 x N
- C 245 x N

# Sources images

- [1] Towage of SSSR Transocean Amirante, source: Transocean
- [2] Tower Mooring, source: unknown
- [3] Rogue waves, source: unknown
- [4] Bluewater Rig No. 1, source: Friede & Goldman, LTD/GNU General Public License
- [5] Source: unknown
- [6] Rig Neptune, source: Seafarer Media
- [7] Pieter Schelte vessel, source: Excalibur
- [8] FPSO design basis, source: Statoil
- [9] Floating wind turbines, source: Principle Power Inc.
- [10] Ocean Thermal Energy Conversion (OTEC), source: Institute of Ocean Energy/Saga University
- [11] ABB generator, source: ABB
- [12] A Pelamis installed at the Agucadoura Wave Park off Portugal, source: S.Portland/Wikipedia
- [13] Schematic of Curlew Field, United Kingdom, source: offshore-technology.com
- [14] Ocean Quest Brave Sea, source: Zamakona Yards
- [15] Medusa, A Floating SPAR Production Platform, source: Murphy USA